



DPWF08A-F3



DPWF14A-F3

**特点**

- 隔离式插座、08A:12A, 14A:10A。
- 直插连接。
- 环保产品 RoHS。

**Features**

- Separable socket,08A:12A,14A:10A.
- Push-in connection
- Green product RoHS.

DPWF 08A-F 3-00A (H)

产品大类:DPWF  
 Product Category:DPWF  
 脚位数量:08A,14A  
 Pin Number:08A,14A  
 保护方式:E:隔离式  
 Protect way:F:Separable structure  
 颜色:3:黑色  
 Colour:3:Black  
 环保:H  
 RoHS:H

性能参数 Performance Parameters

技术参数 Technical parameters

产品型号 Product type	DPWF08A-F3	DPWF14A-F3
额定电流 Rated current	12A	10A
额定电压 Rated voltage	300V	
线圈/触点介质耐压 Coil/Contact dielectric voltage	4000V/S	
触点间介质耐压 Dielectric voltage between contact	2500V/S	
外接导线 External connection wire	22-14AWG/0.25-2.5mm <sup>2</sup>	
环境温度 Ambient temperature	-45~+85°C	
重量 Weight	56.2g	70.5g

配套继电器及配件 Supporting relays and accessories

产品型号 Product type	继电器 Relay	模块 Module	塑料扳扣 Plastic pull clasp	短接片 Bridge
DPWF08A-F3	DRPE-2CH	—	标配 Wear	DFB2-27-13-00Z(H) 颜色: 黑色 Color: black
DPWF14A-F3	DRPE-4C	—	标配 Wear	—


常用套装推荐 Popular Assembled module

24VDC 2×SPDT: DRPEP-2CH-LR-D24-07A(H)  
 24VDC 4×SPDT: DRPEP-4C-LR-D24-07A(H)

220/230VAC 2×SPDT: DRPEP-2CH-LR-A220-07A(H)  
 220/230VAC 4×SPDT: DRPEP-4C-LR-A220-07A(H)

外形尺寸图、接线图 Overall Dimensions, Wiring Diagrams

DPWF08A-F3

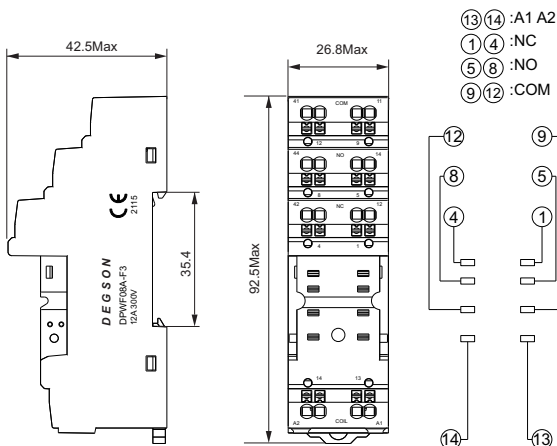

DPWF14A-F3

