
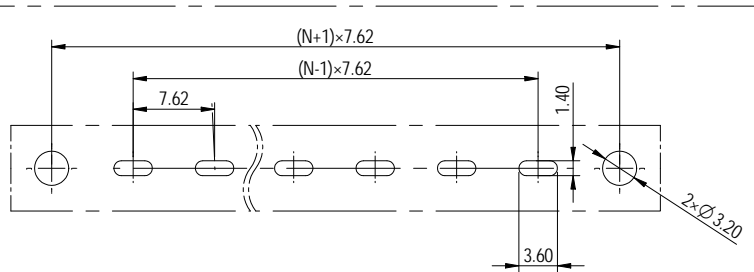
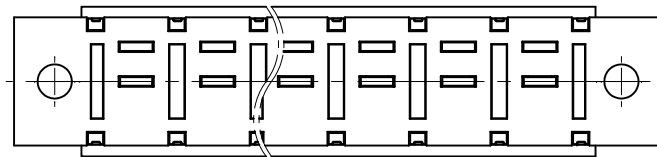
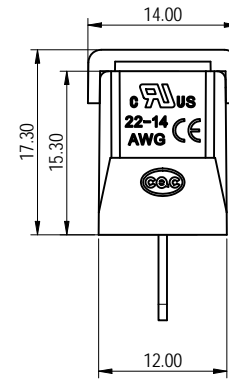
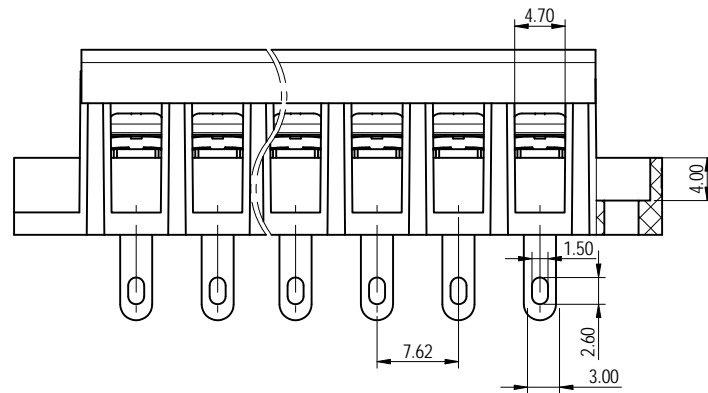



公差表/General tolerances (mm)													D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	0.1/10
													±2	

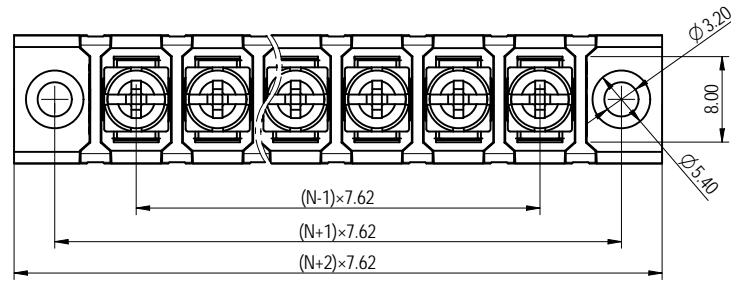

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cover	PC	UL94V-2
3	Pin header	Copper alloy	Sn Plated
2	Screw	Steel	Ni Plated
1	Housing	PA66+GF	UL94V-0

UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	B	C	D
300/15	300/15	300/10	
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	22-12		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02-24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:		SURFACE/COLOR:	
APPD: 蓝美凡	2023.11.06	NAME:	200243700
CHKD: 曹利影	2023.11.06	MAT NO./REV:	/ 00
DRFT: 孙科豪	2023.11.06	MAT STATUS:	批量

DRAWING NO. 200243700					TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布		SCALE 1:1		SHEET 1/1
-----------------------	--	--	--	--	-----------------------	--	--------------------	--	-----------	--	-----------

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent.