
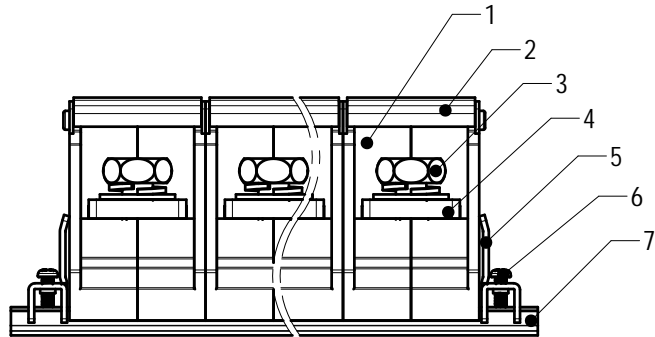
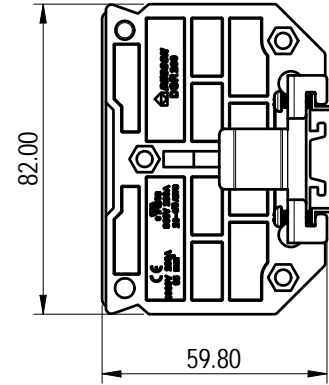


未注公差/General tolerances (mm)													0.1/10 ±2'	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

(W/O COVER)

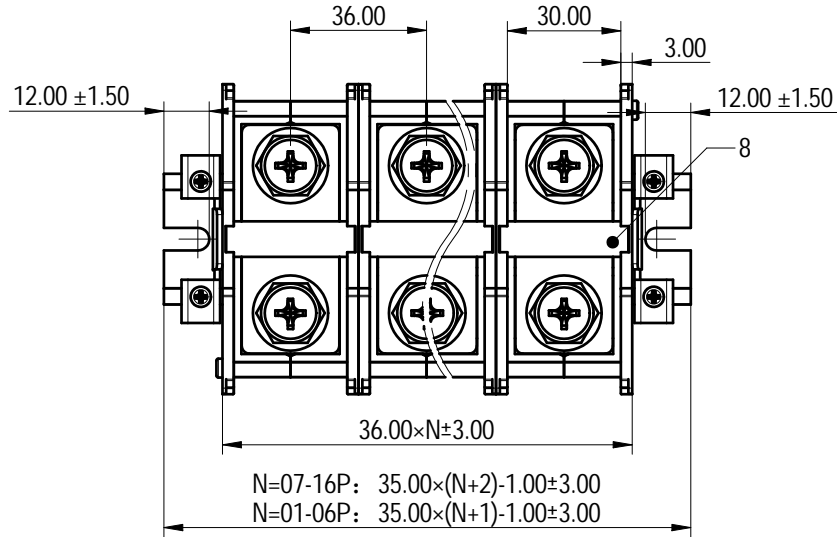

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
8	Tag	PVC	UL94V-0
7	Tramroad	AL	/
6	Screw	Steel	Zn Plated
5	Fastener	SPCC	Zn Plated
4	Current carrier	Copper Alloy	Ni Plated
3	Screw	Steel	Zn Plated
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/200	600/200	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M10, 9.04 / 80		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	4/0~20		
间距/Pitch(mm)/线数范围/Poles	36.0/N=01~16P		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:	
MAT NO./REV: - / 00		MAT STATUS: 批量		
APPD: 蓝贵凡	2023.09.18	NAME		
CHKD: 曹利彬	2023.09.18	DGR200-XXP-1Y-10A&Z(H)		
DRFT: 姜民洁	2023.09.18	DRAWING NO.	TYPE	DRAWING STATUS
④ ⑤ A4 (inch)		200120821	CUSTOMER DRAWING	已发布
SCALE	SHEET			
2:1	1/1			

REV	ECN	DESCRIPTION	DRFT	DATE
02		修改部分尺寸	姜民洁	2023.09.18

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in advance. Violations will be held for compensation. All rights reserved for patent, utility model or designer registrations. 除专利等权利外，其他权利均归本公司所有。未经许可，不得复制或传播。本公司保留对涉及发明、实用新型及外观设计专利的权利。